

MeterLink

Customer Interface Unit



CONSUMER DEVICE

The **MeterLink** is a handheld **customer interface unit (CIU)** designed for end users to interact with energy meters using the **DLMS/COSEM** protocol and operate in compliance with **STS/CTS standards**. It enables monitoring of energy consumption and supports prepayment activities. With a slim, lightweight, and durable design, it offers mobility and resilience in various environments, displaying DLMS energy parameters and alarm statuses via keypad input.



DLMS[®]



STS COMPLIANT



MULTIPLE ALARMS




REMOTE UPGRADE



Technical Specification:

Rated voltage	Micro USB supply or Two sections of 7 battery supply
Operating voltage range	DC 5 V $\pm$ 0.5V(USB) or DC 3V (battery)
Temperature	Normal Operation range: -25°C to +55°C Limit operation range: -35°C to +65°C Limit range for storage and transport: -40°C to +70°C
Power Consumption	Voltage circuit (active): $\leq$ 2 W Voltage circuit (apparent): $\leq$ 5VA
Electromagnetic Compatibility	Electrostatic Discharges: Contact 8kV, air 15kV Fast transient burst: USB power cord coupling group of pulses: 1kV
Protection class	IP51
Lifetime	$\geq$ 10 years
Short Code Function	• Query data and display • Relay test, active overdraft and so on
Status Indication	• LED, buzzer indication • Buzzer alarm can be interrupted by keypad
LCD Display	• Large digit LCD display, easy for reading • Display readable without main power • LCD backlights to increase readability in low light conditions • Flexible display mode
Token Input	• Support enter 20 digits token by keypad
Communication	• Communicate with MCU via RF or PLC module • Communication distance more than 150 meters

Diagram

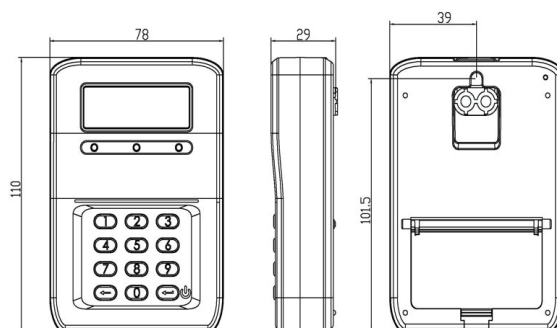

EDMP

📍 PO Box 125428, Office P3-08, The Binary,
32 Marasi Drive, Business Bay, Dubai, UAE
✉ info@edmpco.com 🌐 www.edmpco.com

Copyright © 2025 EDMP Limited. All Rights Reserved. All trademarks are the property of their respective holders. EDMP's Policy is one of continuous product development and the right is reserved to modify specifications contained herein without notice.