

GW30

GPRS Gateway



Powering the Future with Precision and Control

GW30 provides transparent gateway communication between **RF** or **RS-485** (configurable) to up to **100** connected meters and a compatible head-end system. Integration GPRS functionality provide the unit with reliable backhaul communications, while local area connectivity is established via RS-485. Designed and optimised for DIN rail installations.



COMMUNICATIONS



Heartbeat
Mechanism



RF
Communication



Password
Protection




Remote
Upgradable



Main Functionalities

Standards & Compliance	- IEC 62052-11 - CE Compliant
Frequency Bands	- WAN: GPRS (850/900/1800/1900MHz) - NAN*: RF (433MHz and 915MHz), RS-485 2-wire
Data	- GPRS: UL 85.6kbps, DL 107kbps - RF 433MHz and 915MHz: 19.2kbps to 38.4kbps
RF Power	- Class 4 GPRS 850/900 MHz (2W) - Class 1 GPRS 1800/1900 MHz (1W) - RF 433MHz and 915MHz (50mW)
Coverage Range	- RS-485: Up to 17 nodes - RF 433MHz and 915MHz: up to 100m
Electrical	- Operating voltage: 100V to 240V - Voltage circuit: 10VA, <2W
Interface	- Antenna: RF and GPRS (SMA female connector) - RS-485 2-wire interface - LED status indicator - Mini SIM (2FF): 3V/1.8V
Module	- Cellular: SIM800C - Wireless: MSi4463 (433MHz and 915MHz)
Environmental	- Specified operating range: -25°C to +55°C - Operating range limit: -40°C to +70°C - Storage range limit: -30°C to +80°C - Relative humidity: < 95% non-condensing - Ingress protection: IP54

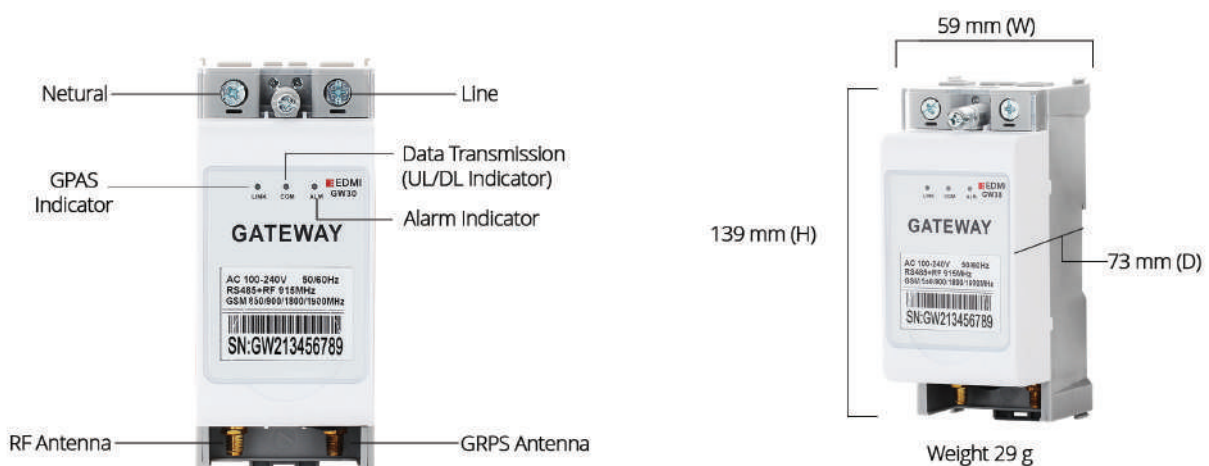

EDMP

Design and Product of EDMP Limited

PO Box 125428, Office P3-08, The Binary,
32 Marasi Drive, Business Bay, Dubai, UAE
info@edmpco.com www.edmpco.com

Copyright © 2025 EDMP Limited. All Rights Reserved. All trademarks are the property of their respective holders. EDMP's Policy is one of continuous product development and the right is reserved to modify specifications contained herein without notice.