

MAGNO 22

Single Phase BS Smart Energy Meter with Keypad

The Magno 22 with Keypad is a cutting-edge single-phase smart electricity meter designed to support both postpaid and prepaid systems. It offers a comprehensive suite of features, including power grid monitoring, load control, tamper detection, and vending functions, making it an ideal solution for residential and commercial applications.

The Magno 22 with Keypad provides real-time insights into energy usage, enabling utilities to manage consumption more effectively and advanced anti-tamper capabilities that help protect against fraud and minimise losses—boosting utility revenues and strengthening overall grid integrity.

Fully compliant with STS/CTS standards for prepaid metering via keypad entry, as well as the DLMS/COSEM and IDIS protocol for seamless integration, the Magno 22 with Keypad ensures reliable performance and compatibility with existing Advanced Metering Infrastructure (AMI) networks.



ELECTRICITY



Main Functionalities

Standards & Compliance	• IEC 62052-11, 21, 31 • IEC 62053-23, 24 • IEC 62059-31-1 • IEC 62059-32-1 • EN62053-23 • EN50470-3 • DLMS/COSEM • STS/CTS • IDIS Package 2 • G3-Alliance
Measurement	• quadrants • Import/Export Absolute/Q1/Q2/Q3/Q4: Wh, varh and VAh • Vrms, Irms • Power factor, frequency • V-I Phase angle • Absolute value $Ai = +A + -A$ $Ae = -A$ • Neutral Current Measurement
Multi TOU Tariff	• Up to 8 tariff • Up to 200 programmable special days Daily, Weekly, Monthly, Yearly & Special • Up to 8 separate import and export registers • Up to 12 seasons • Up to 24 periods
Prepayment	• Configurable prepayment and post-payment mode • Three levels for remaining credit alarm • Emergency credit, friendly time and friendly days support • Dual wallet • Meter Keypad (Optional)
Load control	• Remote control command support • Over current control support • Power limit support • 1 poles internal relay (for 100A meter) • 2 poles internal relay (for 80A meter) • Disconnect/Reconnect by locally or remotely
Load Profile	• Up to 60 channels • Support 3 independent surveys • 24hrs daily survey • Intervals programmable from 1 to 60 minutes • Storage 8 channels (15 min) for a year
Communication Ports	• WAN: Plug and play module to support various communication technology • WAN: G3-PLC, WiSUN, Cellular (GPRS, 3G, 4G/LTE, NB-IoT), or Ethernet • RF or PLC module – For communication with CIU (Customer Interface Unit) • Optical: Comply with IEC21-62056 standard, DLMS(IEC21-62056 mode E) • Additional: RS485 (2 wire), VTC interface
Input/Output Ports (Optional)	• Pulse Output • Dual Resource Signal (Tariff change) • Meter enclosure opening/tamper detection (Active input)


Additional Functionalities

Event	• Fraud detection log (Meter cover & terminal cover open detect with and without power, module cover open detect, current reverse, magnetic detect, neutral current mismatch etc.) • Failure detection log (Memory error, relay error, battery low voltage, clock invalid etc.) • Power quality event log (Under voltage / Over voltage(Sag/Swell) ,Over current/current imbalance, Power up/down, etc.) • Security event log (Parameters change, clock adjust, etc.) • Standard event log (Power up/on, time synchronization, etc.)
Anti Tamper	• More than 4 sealing positions • Terminal cover, meter cover and module cover sealing • Self-protection under Overload control, Abnormal voltage control, Arrearage control, Tamper control, • Malfunction control, Fire disaster control etc.
Alarm	• Alarms with LED/Buzzer and LCD on CIU • Alarm can be configurable
Tariff Expense (Optional)	• Up to 10 steps tariff • Up to 5 steps Monthly service charge • Up to 5 kinds subsidy • Up to 3 kinds fixed charge • Up to 5 kinds levies charge • Up to 3 kinds VAT charge
Communication Protocol	• International open protocol • IEC21-62056 E mode DLMS • HDLC DLMS and TCP/IP DLMS, Support suite 0 and suite 1 • STS/CTS Token and SMS • LLS support 3 level passwords for local and remote communication • HLS support auth and encryption for local and remote communication • IDIS Compliant
Billing Record	• Up to 13-month billing data • Calculate monthly net consumption of energy • Up to 31 days daily data • Calculate daily net consumption of energy
Firmware Upgrade	• The firmware can be upgraded via local interface and WAN interface. • Schedule activity image support
CIU unit	• The meter can communicate with the CIU via RF or PLC • Parameters transfer • Credit token, Key change token, clear balance token, clear tamper token, set power limit token, test token etc. • Fully complies with STS standard
Keypad	• High-durability silicone rubber keypad • 12-key numeric keypad (0-9, Enter, Clear) • Soft-touch keys with enhanced tactile response

Technical Specification

Rated Nominal Voltage	220V~240V, 110V~120V
Operating Voltage Range	50 %Un~120 % Un (When Un = 220V-240V) 80 %Un~120 % Un (When Un = 110V-120V)
Rated Current & Starting Current	5(100)A, 5(80)A and 0.4% Ib
Rated Current & Starting Current	50Hz or 60Hz ± 5 %
Pulse Constant (Configurable)	1000imp/kWh 1000imp/kvarh (Default)
Accuracy Class	Cl.1 for Active Cl.2 for Reactive
Power Consumption	Voltage circuit ≤ 2 W or 5VA, Current circuit ≤ 0.5 VA
Battery and Life	Replaceable Lithium battery, life more than 15 years Supercap (Optional) – 5 yr lifetime with power off
Normal Operation Range	-25°C to + 60°C, Humidity is up to 95 %
Limit Operation Range	-40°C to + 70°C, Humidity is up to 95 %
EMC Performance	Impulse voltage > 10kV, AC voltage > 4kV, Short circuit current > 3kA, Electrostatic Discharge contact: 8kV & air: 15kV
Protection Class	IP54 compliant with IEC60529 Insulation grade II
Housing Material	Polycarbonate with non-conductive, high impact, smooth finish, durable, non-flammable, UV stabilized,

Diagram

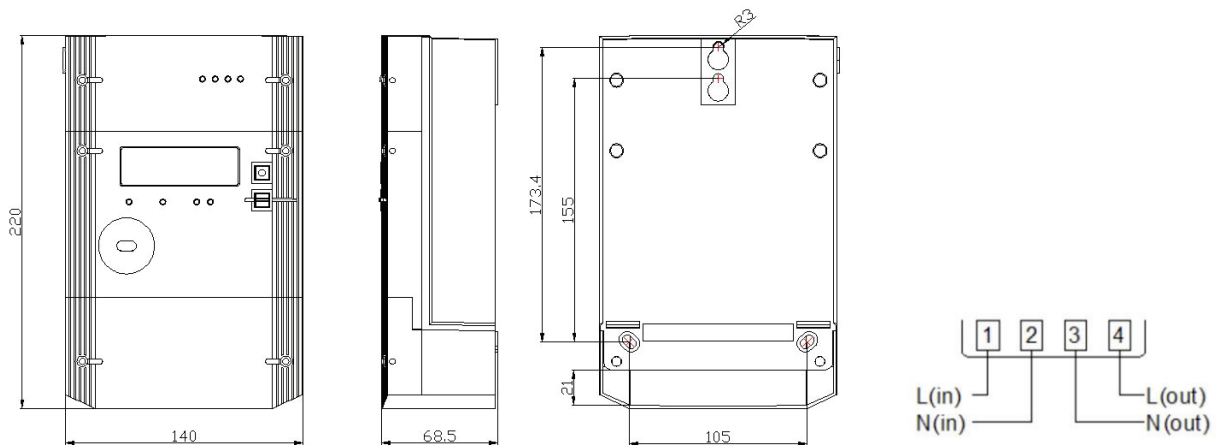

EDMP
Design and Product of EDM Limited

PO Box 125428, Office P3-08, The Binary,
32 Marasi Drive, Business Bay, Dubai, UAE
info@edmpco.com www.edmpco.com

Copyright © 2025 EDM Limited. All Rights Reserved. All trademarks are the property of their respective holders. EDM's Policy is one of continuous product development and the right is reserved to modify specifications contained herein without notice.