

# Mk32H

## ABACUS – Advanced Single Phase DIN-Rail Meter

Designed for residential use, Mk32H is a DIN Rail single phase meter with integrated 100A UC3 compliant relay. It is able to operate in either STS compliant prepaid mode or post-paid mode. Mk32H can operate with the CIU (Customer Interface Unit) - HD18 wirelessly as a split meter as well as operate with gateway – GW30 and the Head End System – MultiDrive as a complete AMI system.



STS  
ASSOCIATION



RF  
RF WIRELESS  
TRANSCEIVER



DLMS  
PROTOCOL



SMART  
READY



# Main Functionalities

## Standards & Compliance

- IEC 62052-11
- IEC 62053-21
- IEC 62053-23
- IEC 62054-41

## Measurement

- 1 Phase 2 Wire
- Neutral Current Measurement (Optional)
- 1 element 4 quadrants
- Import/Export/Absolute Wh, varh and VAh
- Per quadrant: varh
- W, var, VA, Vrms, Irms
- Power factor, frequency

## Multi TOU Tariff

- Up to 8 separate import and export registers
- Daily, weekly, monthly, yearly and special days
- Up to 48 previous billing periods plus billing totals
- Block maximum demand
- Time of maximum demand

## Prepayment

- Configurable prepayment and post-payment mode
- Three levels for remaining credit alarm
- Emergency credit, friendly time and friendly days support
- STS Compliant

## Load control

- Over current control support
- Power & current limit support
- Internal disconnect relays (80A or 100A)
- Re-connect/Dis-connect by locally or remotely

## Load Profile

- Up to 8 channels and 2 independent surveys
- Interval programmable from 1 to 60 minutes
- Energy, instantaneous readings channel sources
- Average/minimum/maximum values for interval duration

## Communication Ports

- RF (260MHz - 930MHz) – Communicate with Gateway (GW30)
- RS485(2-wire)
- RF 433 MHz – Communicate with CIU (User Interface Unit)
- Optical Port: Comply with IEC62056-21standard

## Security

- Multi-level security (username and password including encrypted log-in)
- Up to 10 independent security levels
- Up to 8 individual users


## Additional Functionalities

<b>Event</b>	<ul style="list-style-type: none"><li>• Fraud detection log (Meter cover &amp; terminal cover open detect with and without power, module cover open detect, current reverse, magnetic detect, neutral current mismatch etc.)</li><li>• Failure detection log (Memory error, relay error, battery low voltage, clock invalid etc.)</li><li>• Power quality event log (Under voltage / Over voltage(Sag/Swell), Over current/current imbalance, Power up/down, etc.)</li><li>• Security event log (Parameters change, clock adjust, etc.)</li><li>• Standard event log (Power up/on, time synchronization, etc.)</li></ul>
<b>Anti Tamper</b>	<ul style="list-style-type: none"><li>• Terminal cover, meter cover and module cover sealing</li><li>• Self-protection under Overload control, Abnormal voltage control, Arrearage control, Tamper control, Malfunction control, Fire disaster control etc.</li></ul>
<b>Alarm</b>	<ul style="list-style-type: none"><li>• Alarms with LED/Buzzer and LCD on CIU</li><li>• Alarm can be configurable</li></ul>
<b>Tariff Expense (Optional)</b>	<ul style="list-style-type: none"><li>• Up to 10 steps tariff</li><li>• Up to 5 steps Monthly service charge</li><li>• Up to 5 kinds subsidy</li><li>• Up to 3 kinds fixed charge</li><li>• Up to 5 kinds levies charge</li><li>• Up to 3 kinds VAT charge</li></ul>
<b>Communication Protocol</b>	<ul style="list-style-type: none"><li>• International open protocol</li><li>• IEC62056-21 E mode DLMS</li><li>• HDLC DLMS and TCP/IP DLMS, Support suite 0 and suite 1</li><li>• STS/CTS Token and SMS</li><li>• LLS support 3 level passwords for local and remote communication</li><li>• HLS support auth and encryption for local and remote communication</li></ul>
<b>Billing Record</b>	<ul style="list-style-type: none"><li>• Up to 12-month billing data</li><li>• Calculate monthly net consumption of energy</li><li>• Up to 31 days daily data</li><li>• Calculate daily net consumption of energy</li></ul>
<b>Firmware Upgrade</b>	<ul style="list-style-type: none"><li>• The firmware can be upgraded via local interface and WAN interface.</li><li>• Schedule activity image support</li></ul>
<b>CIU unit</b>	<ul style="list-style-type: none"><li>• The meter can communicate with the CIU via RF or PLC</li><li>• Parameters transfer</li><li>• Credit token, Key change token, clear balance token, clear tamper token, set power limit token, test token etc.</li><li>• Fully complies with STS standard</li></ul>

## Technical Specification

<b>Rated Nominal Voltage</b>	220V – 240V
<b>Operating Voltage Range</b>	0.5Un to 1.2Un
<b>Rated Current &amp; Starting Current</b>	5(100)A, 5(60)A
<b>Rated Frequency</b>	50Hz, 60Hz ±5%
<b>Pulse Constant (Configurable)</b>	1000imp/kWh 1000imp/kvarh (Default)
<b>Accuracy Class</b>	Cl.1 for Active Cl.2 for Reactive
<b>Power Consumption</b>	Voltage circuit ≤2 W or 10VA, Current circuit ≤2.5VA
<b>Battery and Life</b>	Internal Lithium Battery (3.6V) Backup Time: 5 years without battery (lithium Battery)
<b>Specified Operation Range Operating Range Limit</b>	-25°C to +55°C, Humidity is up to 95% -40°C to +70°C Humidity is up to 95%
<b>EMC Performance</b>	Impulse voltage > 6kV
<b>Protection Class</b>	IP54 comply with IEC60529 Insulation grade II
<b>Housing Material</b>	Polycarbonate with non-conductive, high impact, smooth finish, durable, non-flammable, UV stabilized, UV resistant and high resistance to weathering

### Diagram

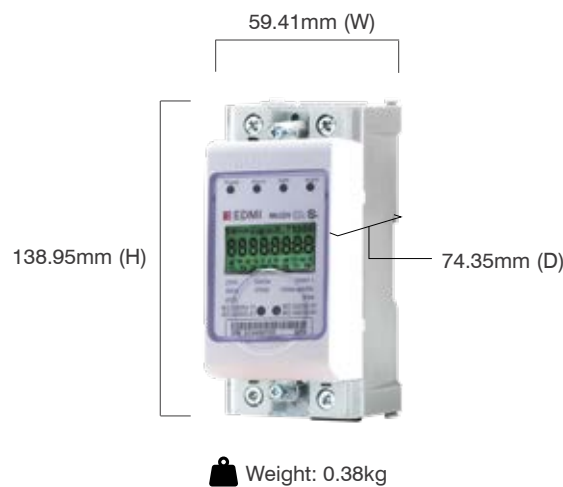

**EDMP**  
Design and Product of EDMI Limited

📍 PO Box 125428, Plot No. MO0147C, Junction of N400 & N406 Streets,  
Jebel Ali Free Zone, Dubai, United Arab Emirates  
✉ info@edmpco.com 🌐 www.edmpco.com

Copyright © 2026 EDMP Limited. All Rights Reserved. All trademarks are the property of their respective holders. EDMP's Policy is one of continuous product development and the right is reserved to modify specifications contained herein without notice.